


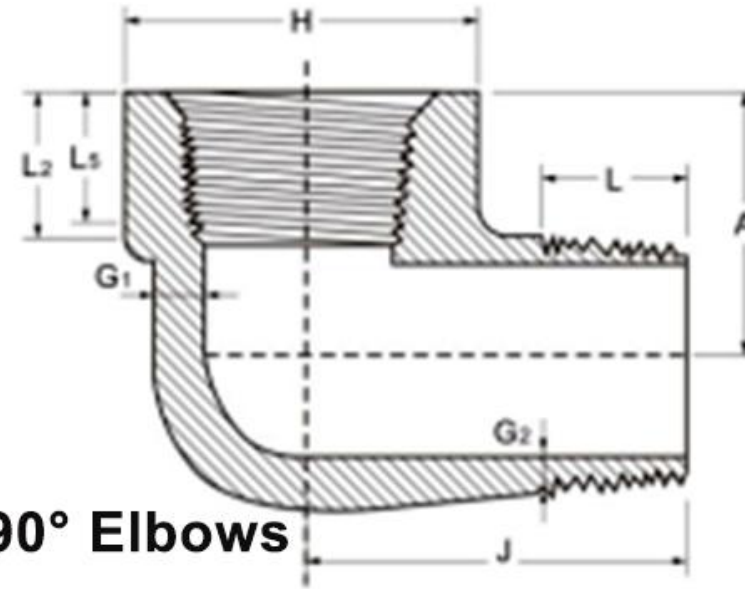

Street 90° Elbows

JINIE TECHNOLOGY (JIANGSU) CO., LTD.

ASME B16.11 Street 90°Elbows

Nominal size		Center to female End		Center to male End		Outside diameter to band		Wall thickness		Wall thickness		Length of female thread		Length of male thread
DN	NPS	A		J		H		G _{1min}		G _{2min}		L _{5min}	L _{2min}	L _{min}
		3000	6000	3000	6000	3000	6000	3000	6000	3000	6000			
6	1/8	19	22	25	32	19	25	3.18	5.08	2.74	4.22	6.4	6.7	10
8	1/4	22	25	32	38	25	32	3.30	5.66	3.22	5.28	8.1	10.2	11
10	3/8	25	28	38	41	32	38	3.51	6.98	3.50	5.59	9.1	10.4	13
15	1/2	28	35	41	48	38	44	4.09	8.15	4.16	6.53	10.9	13.6	14
20	3/4	35	44	48	57	44	51	4.32	8.53	4.88	6.86	12.7	13.9	16
25	1	44	51	57	66	51	62	4.98	9.93	5.56	7.95	14.7	17.3	19
32	1 1/4	51	54	66	71	62	70	5.28	10.59	5.56	8.48	17.0	18.0	21
40	1 1/2	54	64	71	84	70	84	5.56	11.07	6.25	8.89	17.8	18.4	21
50	2	64	83	84	105	84	102	7.14	12.09	7.64	9.70	19.0	19.2	22

Note:

- 1) For the manufacturer's option, dimensions A and H of the threaded 90° elbow can be employed.
- 2) NPT thread shall be machined as per GB/T 12716 (equivalent to B1.20.1).